
Mobile Collocated Interactions: From Smartphones to Wearables

Andrés Lucero

Mads Clausen Institute
University of Southern Denmark
DK-6000 Kolding, Denmark
lucero@acm.org

James Clawson

Georgia Institute of Technology
School of Interactive Computing
Atlanta, GA, USA
jamer@gatech.edu

Kent Lyons

Yahoo Labs
701 First Ave.
Sunnyvale CA 94089, USA
klyons@yahoo-inc.com

Joel E. Fischer

The Mixed Reality Lab
School of Computer Science
University of Nottingham, UK
joel.fischer@nottingham.ac.uk

Daniel Ashbrook

Golisano College of Computing and
Information Sciences
Rochester Institute of Technology
daniel.ashbrook@rit.edu

Simon Robinson

Future Interaction Technology Lab
Swansea University
Swansea, UK.
s.n.w.robinson@swansea.ac.uk

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the Owner/Author.

Copyright is held by the owner/author(s).

CHI'15 Extended Abstracts, Apr 18-23 2015, Seoul, Republic of Korea
ACM 978-1-4503-3146-3/15/04.
<http://dx.doi.org/10.1145/2702613.2702649>

Abstract

Mobile devices such as smartphones and tablets were originally conceived and have traditionally been utilized for individual use. Research on *mobile collocated interactions* has been looking at situations in which collocated users engage in collaborative activities using their mobile devices, thus going from *personal/individual* toward *shared/multiuser* experiences and interactions. However, computers are getting smaller, more powerful, and closer to our bodies. Therefore, *mobile collocated interactions* research, which originally looked at smartphones and tablets, will inevitably include ever-smaller computers, ones that can be worn on our wrists or other parts of the body. The focus of this workshop is to bring together a community of researchers, designers and practitioners to explore the potential of extending *mobile collocated interactions* to the use of wearable devices.

Author Keywords

Collaboration; handheld devices; multi-device; multi-user; device binding; wristwatch; finger ring; jewelry

ACM Classification Keywords

H.5.m. Information interfaces and presentation (e.g., HCI): Miscellaneous.

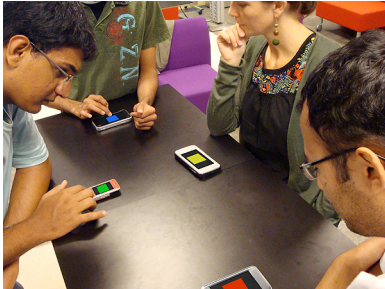


Figure 1. Kapteeni, a distributed memory game on mobile phones based on 1978's Simon game.



Figure 2. MindMap allows a workgroup to create, edit, and view virtual notes on any table.



Figure 3. Pass-them-around allows people to share photos using the metaphor of passing printed photos.

Introduction

Mobile Collocated Interactions

Mobile devices such as smartphones and tablets were originally conceived and have traditionally been utilized for individual use. Research on *mobile collocated interactions* [6][11][16] has been looking at situations in which collocated users engage in collaborative activities using their mobile devices, thus going from *personal/individual* toward *shared/multiuser* experiences and interactions (Figure 1).

Several researchers have explored *mobile collocated interactions*, encouraging people to share their devices to create a collective experience or reach a common goal. Various physical and social contexts of use have been taken into account, such as teamwork at the office [7] (Figure 2), sharing media content at home [8] (Figure 3) and outdoors [3] (Figure 4), public expression in a theme park [4] (Figure 5) and in a pub [9] (Figure 6), and for sharing educational stories in rural, developing-world contexts [17]. More recently, researchers have been looking into simple ways to bind such devices together [10]. Most of this research has been looking at the use of smartphones (and tablets) to study *mobile collocated interactions*.

Wearable technologies

Computers are getting smaller, more powerful, and closer to our bodies. Computers have transitioned from being in a large room (e.g., ENIAC), to our desks (e.g., PCs), to a bag (e.g., laptops), and to our pockets (e.g., mobile phones). Wearable computers (e.g., the WIMM watch¹ or iPod Nano²) have continued the trend

towards ever-smaller computers, ones that can be worn on our wrists (e.g., Apple Watch³) or other parts of the body (e.g., Google Glass⁴).

Researchers have actively looked into novel input wearable devices. For example, Nenya [1] (Figure 7) consists of a magnetic finger ring that provides an always-available input mechanism. It allows for simple input actions such as twist to select and slide along the finger to click. A wrist-worn sensor tracks this small and socially acceptable ring. Facet [14] (Figure 8) is a multi-display bracelet consisting of multiple independent touch-sensitive segments. It supports multi-segment touch, yielding a rich set of touch input techniques. BitWear [15] (Figure 9) is a prototyping platform for small, wireless, interactive devices. BitWear incorporates hardware, wireless connectivity, and a cloud component to enable collections of connected devices. *NotifEye* [12] uses a rub pad placed on people's index finger to provide input to interactive glasses by means of small, subtle finger movements. A natural first step for this line of research has been to look into individual use of these wearable devices.

Towards Mobile Collocated Interactions with Wearables Mobile collocated interactions research, which originally looked at smartphones and tablets, will inevitably include ever-smaller computers in different form factors. The focus of this workshop is to bring together a community of researchers, designers and practitioners to explore the potential of extending *mobile collocated interactions* to the use of wearable devices.

¹ WIMM One. www.wimm.com/

² iPod Nano. <https://www.apple.com/ipod-nano/>

³ Apple Watch. <https://www.apple.com/watch/>

⁴ Google Glass. <https://www.google.com/glass/start/>



Figure 4. Mobiphos allows a group of collocated people to capture and simultaneously share photos.



Figure 5. Automics allows people to capture, share and annotate photos amongst theme park visitors.



Figure 6. MobiComics allows groups of collocated people to create and edit comic strip panels.

Workshop Goals

In previous workshops on the subject of *mobile collocated interactions* at MobileHCI '11 [16] and at ITS '13 [2], several design and evaluation challenges were identified as being the core of this research area: group size, physical distance, device-binding, operating systems, privacy, extending to public displays and tabletops, and conducting in-the-wild evaluations. One question that was introduced in our first workshop and that still remains unanswered is *how can we move beyond just designing for smartphones?*

We are currently witnessing how computers are getting smaller, more powerful, and closer to our bodies. As Google Glass, Pebble, Android Wear and Apple Watch gain popularity, we will soon be considering situations where people want to use a rich ecosystem of small wearable devices and engage in *mobile collocated interactions*. Such interactions may include clothing, eyewear, wristwatches, rings, pendants, and jewelry.

In this workshop we want to continue exploration of *mobile collocated interactions* and promote research into this domain. In particular, the focus will be on creating a deeper understanding of designing and evaluating collocated interactions with wearable devices. The goals of this workshop are:

- Identify key opportunities for *mobile collocated interactions* with wearable devices.
- Investigate how devices will be bound together.
- Consider more intimate or personal ways for interaction, as these devices get closer to our bodies.

- Explore interaction paradigms that can be (re-) appropriated for such interactions.
- Examine adequate ways of prototyping and evaluating such systems.

Workshop Plan

The aim is to bring together a mix of researchers and practitioners from disciplines such as interaction design, human factors, computer science, art, and HCI who are interested in exploring mobile collocated interactions with wearable technologies.

The first half of the workshop (the morning) will be dedicated to introducing emerging forms of mobile collocated interactions with wearable technologies and the presentations of the individual attendees. Time will be spent preparing a list of topics for the afternoon.

The second half of the workshop (the afternoon) will consist of a 'hands on' session, where we will split into three teams and try to create three working prototypes using wearable technologies. We will scaffold this activity by introducing participants to Lundgren et al.'s design framework for mobile collocated interaction [13]. Each team will take a particular aspect of transitioning from mobile collocated interactions with smartphones to wearable technologies (presented or identified during the morning session). We will bring Bluetooth Low Energy devices, WIMM, and Arduino to sketch mobile collocated interactions. We will then work out a concept for collocated interactions based on wearables and create a simple working prototype. This activity will stimulate discussion on how to prototype and evaluate such concepts.



Figure 7. Nenya is a magnetic ring allowing simple input actions such as twist to select and slide to click.



Figure 8. Facet is a multi-display bracelet consisting of independent touch-sensitive segments.



Figure 9. BitWear is a prototyping platform for small, wireless, interactive devices.

The results of the workshop will be summarized and published on the workshop's website⁵. Depending on the maturity of the submissions and the outcome of the workshop, we intend to write a special journal issue with an appropriate publisher to promote this research area.

References

- [1] Ashbrook, D., Baudisch, P. and White, S. Nenya: subtle and eyes-free mobile input with a magnetically-tracked finger ring. In *Proc. CHI '11*, ACM Press (2011), 2043-2046.
- [2] Campos, P., Ferreira, A. and Lucero, A. Collaboration meets interactive surfaces: walls, tables, tablets, and phones. In *Proc. ITS '13*, ACM Press (2013), 481-482.
- [3] Clawson, J., Volda, A., Patel, N. and Lyons, K. Mobiphos: a collocated-synchronous mobile photo sharing application. In *Proc. MobileHCI '08*, ACM Press (2008), 187-195.
- [4] Durrant, A., Rowland, D., Kirk, D.S., Benford, S., Fischer, J.E. and McAuley, D. Automics: souvenir generating photoware for theme parks. In *Proc. CHI '11*. ACM Press (2011), 1767-1776.
- [5] Fischer, J.E., Reeves, S., Moran, S., Greenhalgh, C., Benford, S. and Rennick-Egglestone, S. Understanding Mobile Notification Management in Collocated Groups. In *Proc. ECSCW 2013*, Springer London (2013), 21-44.
- [6] Lucero, A., Keränen, J. and Jokela, T. Social and spatial interactions: shared co-located mobile phone use. In *CHI EA '10*, ACM Press (2010), 3223-3228.
- [7] Lucero, A., Keränen, J. and Korhonen, H. Collaborative use of mobile phones for brainstorming. In *Proc. MobileHCI '10*, ACM Press (2010), 337-340.

[8] Lucero, A., Holopainen, J. and Jokela, T. Pass-them-around: collaborative use of mobile phones for photo sharing. In *Proc. CHI '11*. ACM Press (2011), 1787-1796.

[9] Lucero, A., Holopainen, J. and Jokela, T. MobiComics: collaborative use of mobile phones and large displays for public expression. In *Proc. MobileHCI '12*. ACM Press (2012), 383-392.

[10] Lucero, A., Jokela, T., Palin, A., Aaltonen, V. and Nikara, J. EasyGroups: binding mobile devices for collaborative interactions. In *CHI EA '12*. ACM Press (2012), 2189-2194.

[11] Lucero, A., Jones, M., Jokela, T. and Robinson, S. Mobile collocated interactions: taking an offline break together. *interactions* 20, 2 (March 2013), 26-32.

[12] Lucero, A. and Vetek, A. *NotifEye*: Using Interactive Glasses to Deal with Notifications while Walking in Public. In *Proc. ACE'14*. ACM Press (2014).

[13] Lundgren, S., Fischer, J.E., Reeves, S. and Torgersson, O. Designing Experiences for Mobile Collocated Interaction. To appear in *CSCW '15*. ACM Press (2015).

[14] Lyons, K., Nguyen, D., Ashbrook, D. and White, S. Facet: a multi-segment wrist worn system. In *Proc. UIST '12*, ACM Press (2012), 123-130.

[15] Lyons, K., Nguyen, D.H., Seki, S., White, S., Ashbrook, D. and Profita, H. BitWear: a platform for small, connected, interactive devices. In *Proc. UIST '13 Adjunct*. ACM Press (2013), 73-74.

[16] Patel, N.J. and Clawson, J. Designing and evaluating mobile systems for collocated group use. In *Proc. MobileHCI '11*. ACM Press (2011), 765-768.

[17] Robinson, S., Vartiainen, E., Jones, M. and Marsden, G. PicoTales: collaborative authoring of animated stories using handheld projectors. In *Proc. CSCW '12*, ACM Press (2012), 671-680.

⁵ Workshop website. funkydesignspaces.com/mobile_collocated/